


# TPS-M6U(72)-370W

370W  
Mono Crystalline Solar Module




## Not Your Average Solar Provider

### Our Products Categories

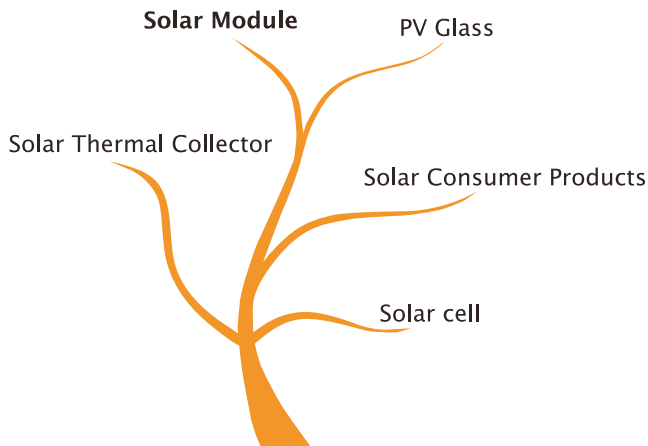

Professional Solar Provider Since 1992

## Electrical Characteristics

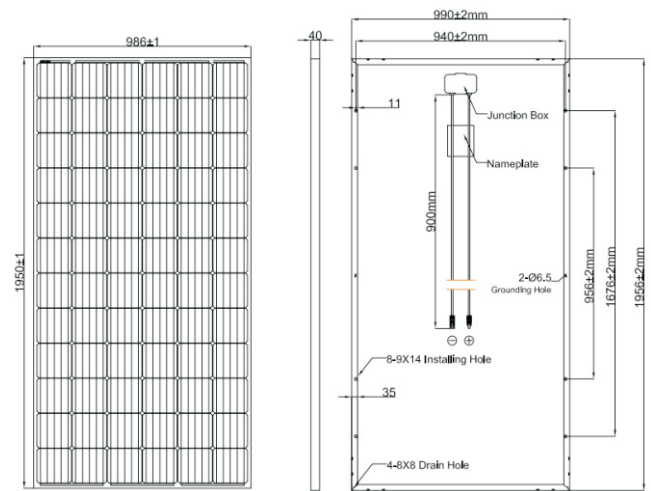

### MECHANICAL SPECIFICATION

Cell Type	Mono crystalline PERC21.6%
Number of cells	72pcs
Dimensions(A×B×C)	1956×990×40mm
Front Glass	3.2mm Low iron tempered glass
Frame	Anodized aluminum alloy
Connector	MC4 plug
Output Cables	Length 0.9m

### PERFORMANCE AT STANDARD TEST CONDITION (STC:1000W/m<sup>2</sup>,25°C,AM1.5)

Module Series	TPS-M6U(72)-370W
Maximum Power at STC(P <sub>max</sub> )	370W
Short Circuit Current(I <sub>sc</sub> )	9.85A
Open Circuit Voltage(V <sub>oc</sub> )	48.2V
Maximum Power Current(I <sub>mp</sub> )	9.54A
Maximum Power Voltage(V <sub>mp</sub> )	38.8V
Module Efficiency	19.10%

### ABSOLUTE MAXIMUM LIMITS

Parameters	Unit	Rating
Operation temperature	°C	-40 to +85
Storage temperature	°C	-40 to +85

### DEALER INFORMATION BOX

## Key Feature

Plus power tolerance: ±5%

Independent research anti-reflective and self-cleaning glass surface reduces power loss from dirt and dust

Excellent performance under low light environments, create better kWh/kW ratio and produce average 2-3% more electricity

## Best Quality

- Junction box and bypass diodes guarantee the modules free of overheating and “hot spot effect”
- 100%EL double-inspection ensures modules are defects free